

**IQ plus® 210** Digital Weight Indicator**STANDARD FEATURES**

- Piezo switch technology with stainless steel buttons (zero and units)
- Large, bold 0.8 in LED display
- NEMA 4X stainless steel enclosure
- Status annunciators: lb, kg, oz, g, negative, motion, center of zero
- Displays units in decimals lb, kg, oz, lb & oz and grams
- One full duplex RS-232 port
- Two digital inputs for remote zero, print and units
- PreVent™ breather vent

**APPROVALS****SPECIFICATIONS****Display:**

6-digit Light Emitting Diode (LED) display  
7-segment, 0.8 in (20 mm) digits

**Excitation:**

10VDC 4 x 350 Ω load cells

**Measurement Rate:**

15, per second

**Display Resolution:**

10,000 dd maximum

**Power Consumption:**

115VAC @ 70 mA,  
or 230VAC @ 35 mA, 50-60 Hz

**Digital Inputs:**

Two inputs, TTL or switch closure, active-low

**Serial Communications:**

Full duplex RS-232, 9600, 4800, 2400, 1200 bps; 7 or 8 databits, even, odd, or no parity

**Operating Temperature:**

14°F to 104°F (-10°C to 40°C)

**Storage Temperature:**

14°F to 122°F (-10°C to 50°C)

**Enclosure Dimensions:**

9.5 x 6.0 x 2.75 in  
(241 x 152 x 70 mm)

**Weight:**

10 lb (4.5 kg)

**Rating Material:**

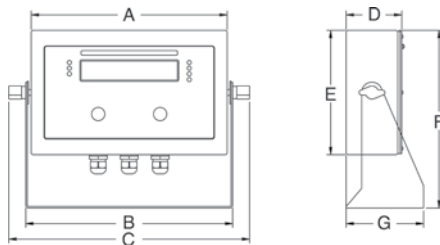
NEMA 4X/IP66, stainless steel

**Warranty:**

Two-year limited warranty

**Approvals:**

NTEP CC 00-045, Class III/IL 10,000d

**DIMENSIONS**

A	9.50 in (241.22 mm)	E	6.00 in (152.4 mm)
B	10.03 in (254.7 mm)	F	8.58 in (217.9 mm)
C	11.67 in (296.4 mm)	G	3.75 in (95.2 mm)
D	2.69 in (68.3 mm)		

**IQ plus® 210** Digital Weight Indicator**IQ PLUS 210**

PART #	DESCRIPTION	EST. SHIP WEIGHT	PRICE
65137	IQ plus 210, 115VAC	10 lb	Consult
65138	IQ plus 210, 230VAC	10 lb	Consult

**OPTIONS/ACCESSORIES**

PART #	DESCRIPTION	PRICE
64640	Additional operating manual	Consult

*\*If ordering the two non-tactile buttons or column without a scale, refer to the replacement parts catalog for part number and pricing*